
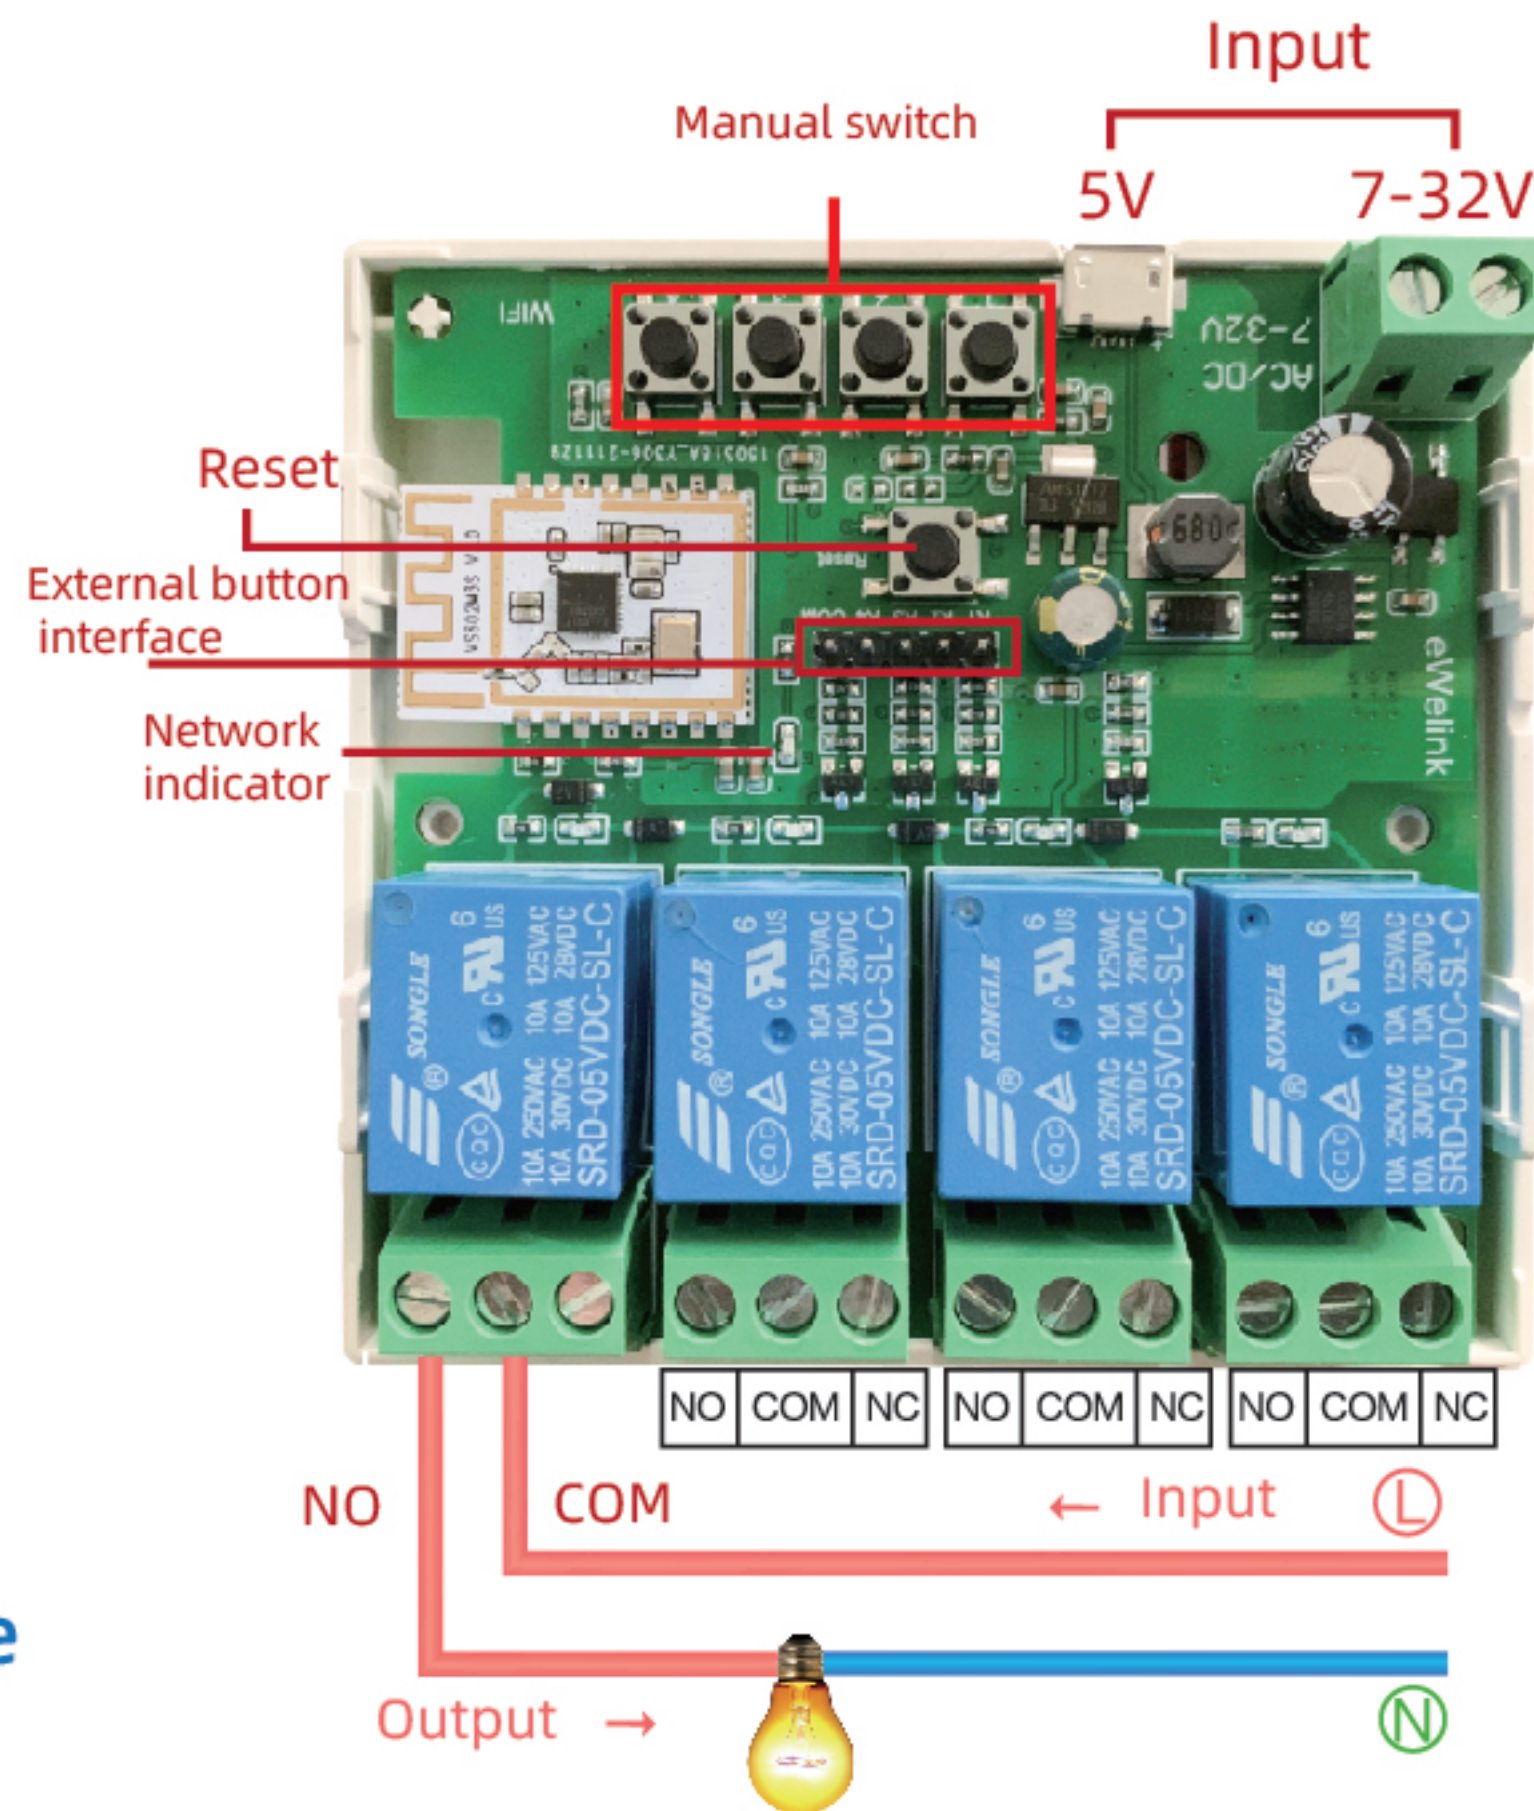


Three Mode WiFi Switch

Model: EWB4CH-B1

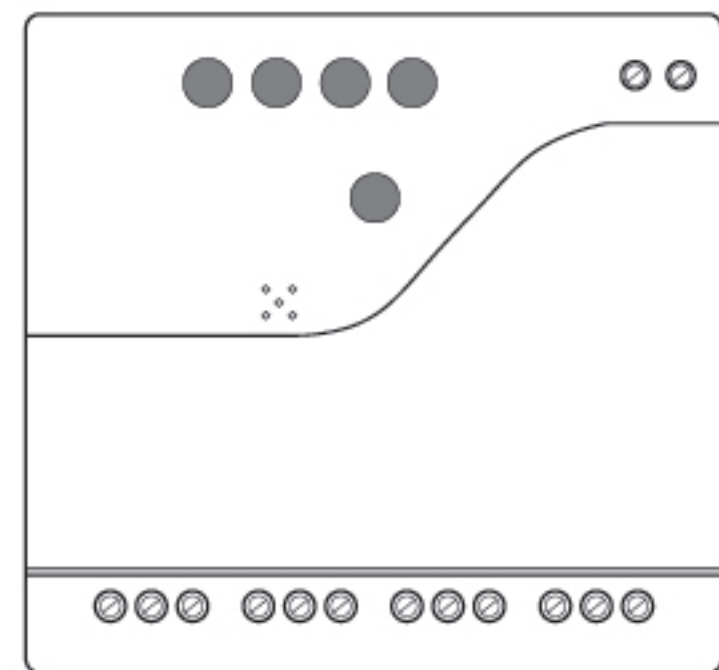

Note: External switches can only be self recovery switches

Parameters:


- Input voltage: DC/AC 7V~32V
- Max.Current:2000W/10A/gang
- Max.load:3500W/16A/4gang
- Wireless:Wi-Fi 2.4ghz b/g/n+Bluetooth
- Frequency radio:2.4G
- Working temperature: -20°C~70°C
- Size: 81*76*28mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.
- You have the correct WiFi PWD.
- You smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide

1 Start with "EWelink" APP.

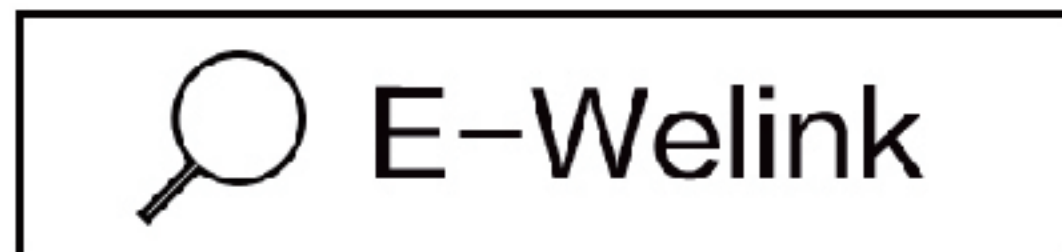


- Register an EWelink account.
- If you have EWelink account, just login.
- Power up.

Add device flow to mobile APP

- After installation, power the device, hold down the Reset button (pairing button) for 6 seconds until Network indicator blinks quickly (blinking twice and on)
- Tap **+** on eWelink app
- Select Bluetooth Pairing.



4 Wait a minute, when the device is found, then click "connect"

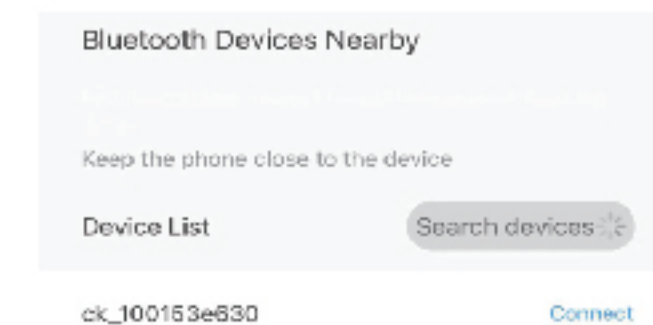


5 Select your WiFi, enter your WiFi password, and then click "save" in the upper right corner to wait for the connection to succeed.




6 When the network indicator is on, the device is online.

Inching / Interlock Switch


1. Click switch name.

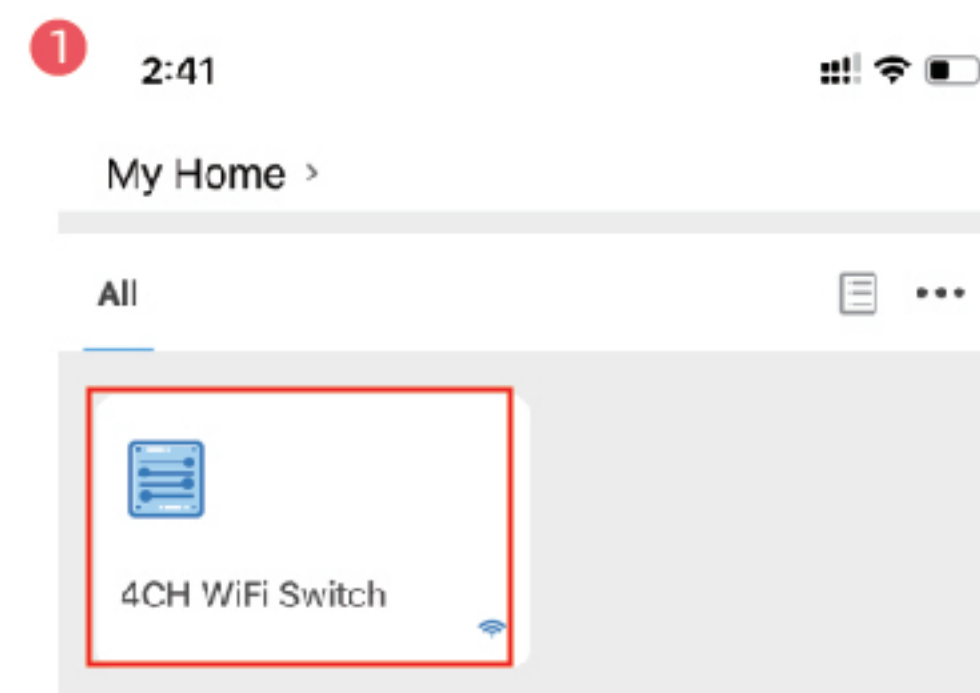


2. Click **...** the upper right corner.

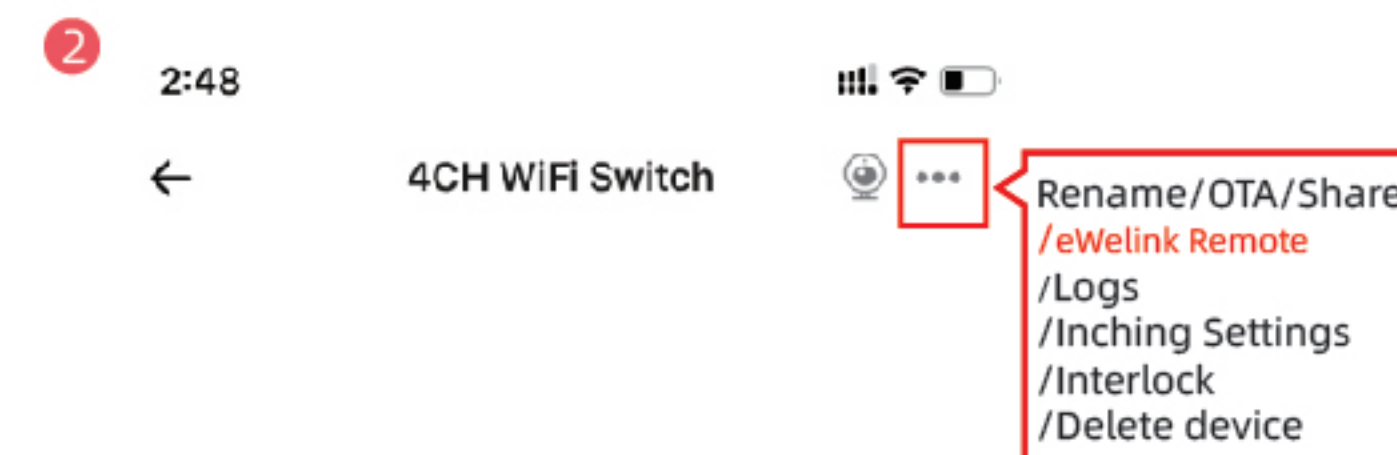

3-1. Set inching duration: Click "Inching Settings", set inching duration.

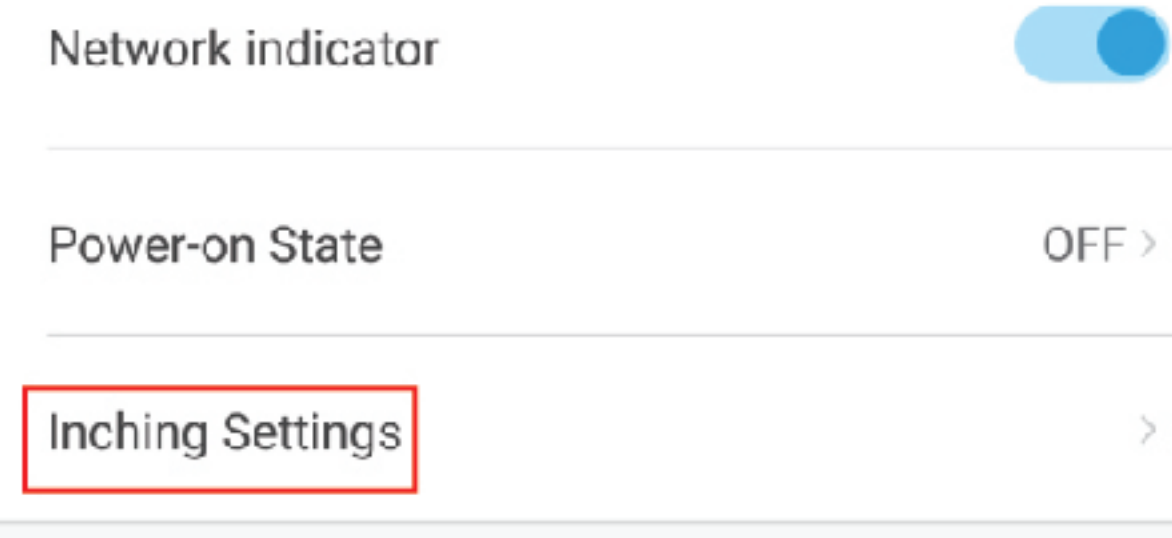

3-2. Enable the interlock: Click "interlock", set the interlock.

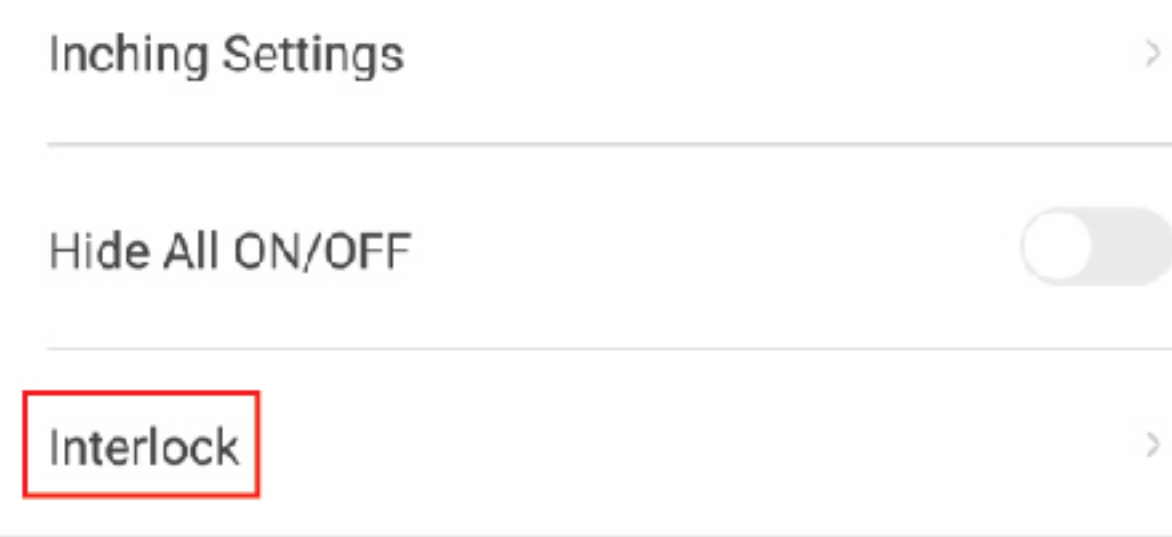

Remote control matches the code

Matching:


- Figure 2 interface, click setting-> eWelink Remote.
- Click the upper button to enter the learning state, and then press the button of 2.4G remote control.
- loosen the remote control buttons, matching success.



TROUBLESHOOTING

Solutions for the failure of product matching and offline:

Enter the homepage of App, click the icon in the lower right corner of the interface to enter. "Message" > hits "Guide". "Profile" > hits "Ewelink support"

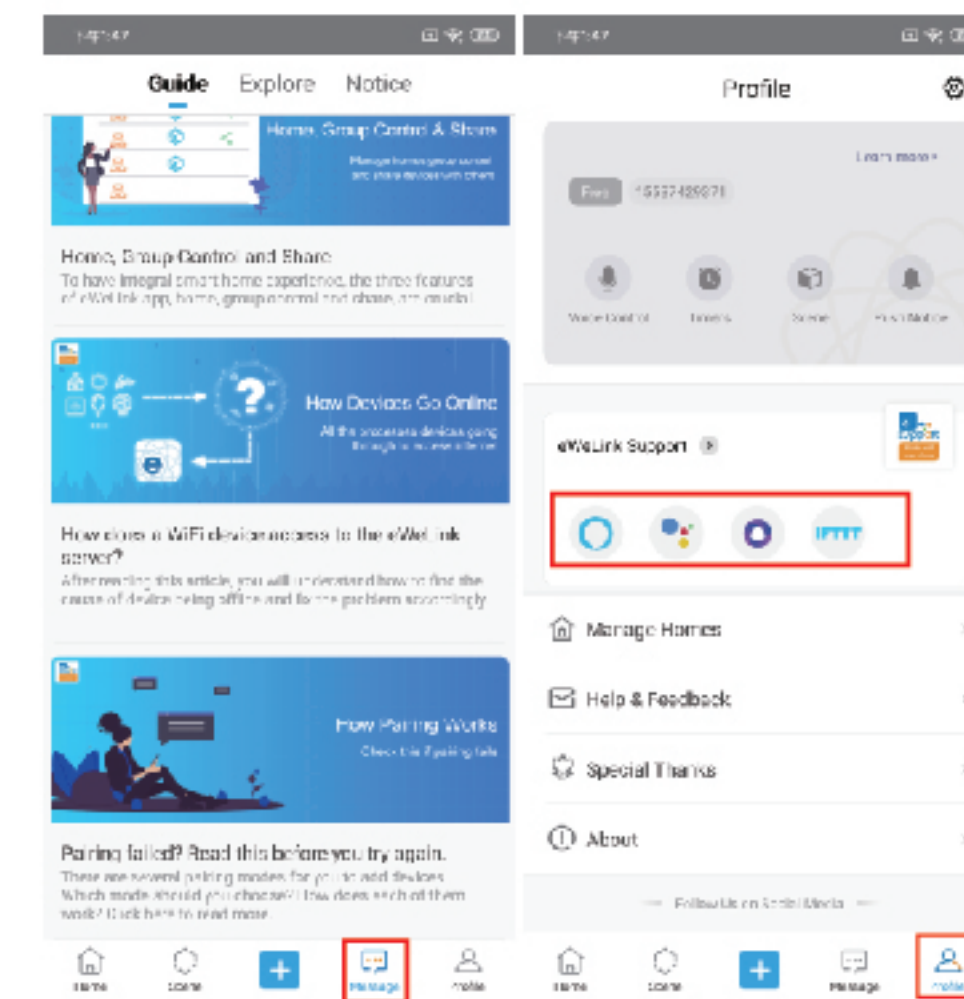

If none of the above is resolved, please open it with another phone. Personal hotspot, try to read.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.